


# B-2020 / B-2030 Prima Jolly Pack

Balaustra regolabile con moduli da 250 o 600 mm.  
 Modular adjustable glass railings 250 or 600 mm.  
 Verstellbares Railing System in teilen 250 oder 600 mm.

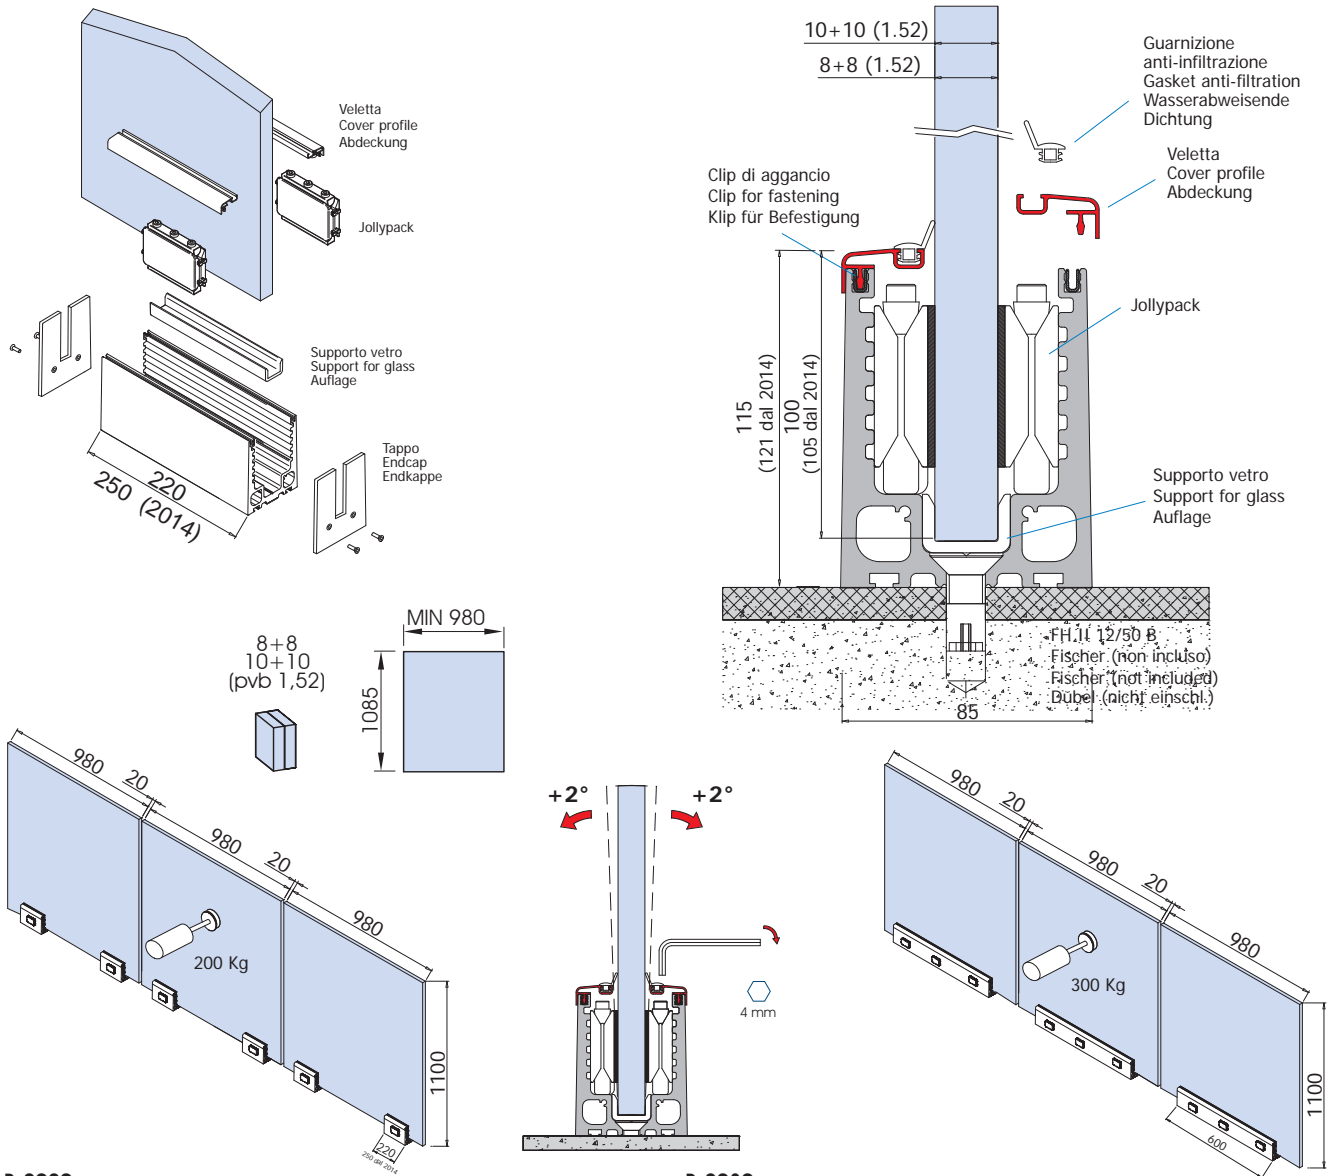

## B-2020

Vetro Glass Glas	Morsetti/mtl Clamps/mt Klemmbeschläge/lfm	Testato spinta Test side force Getestet Seitenkraft	Jolly pack MINI
8+8 1.52 pvb	4	150 kg	*
10+10 1.52 pvb	4	200 kg	*

## B-2030

Vetro Glass Glas	Morsetti/mtl Clamps/mt Klemmbeschläge/lfm	Testato spinta Test side force Getestet Seitenkraft	Jolly pack MINI
8+8 1.52 pvb	4	150 kg	*
10+10 1.52 pvb	4	200 kg	
10+10 1.52 pvb	6	300 kg	

\* Page 93

### B-2020 1,5KN 8



### B-2030 1,5KN 8






### B-2020 2KN 10



### B-2030 2KN 10



### B-2030 3KN 10

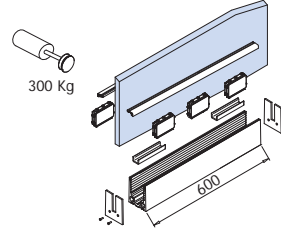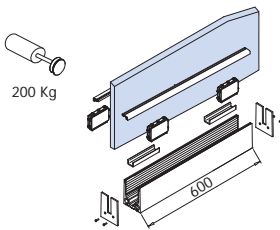

AN = Alluminio anodizzato  
 Aluminium anodized  
 Aluminium Silberfarbig

Le balaustrate per rispettare la resistenza alla spinta devono essere fissate su cemento armato CLS.  
 Balustrades to comply with the side resistance must be fixed on reinforced concrete.  
 Um den Seitenkräften Widerstand entgegenzusetzen müssen die Balustraden auf Stahlbeton befestigt werden.

xme 286W

